



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 7 July 2003



Patent (Rule) of 1977



11FEB03 E783869-1 002896  
P01/7700 0.00-0303012.9

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

MRH.PO4775GB

2. Patent application number

(The Patent Office will fill in this part)

0303012.9

11 FEB 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Richard Warrington George  
Frisby House  
Church Road  
Castlemorton  
Worcestershire

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

6935365002

4. Title of the invention

ISOLATING POWER SUPPLY

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marks & Clerk  
27 Imperial Square  
Cheltenham  
GL50 1RQ

Patents ADP number (if you know it)

18014 /

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

GB

0215814.5

9th July 2002

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:


No

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	10
Claim(s)	3
Abstract	1
Drawing(s)	3 + 3 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)


Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

Marks & Clerk

10th February 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr M R Higgins  
01242 524520

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## ISOLATING POWER SUPPLY

This invention relates to an isolating power supply for electrical equipment.

Over recent years, as the resolution and accuracy of high performance audio and sound equipment has improved, it has become clear that the quality and accuracy of sound reproduction can be dependant on, and adversely effected by, the quality of the incoming power supply to the equipment.

This degradation is due to several factors including unwanted noise superimposed on the power supply by loads with poor power factor, connection to loads which contaminate the supply with radio frequency interference (R.F.I.), and the pickup of R.F.I. and other interference by cabling feeding the equipment.

To counter this problem many manufacturers now offer costly mains conditioning units, mains filters and specialist low inductance noise cancelling cables for connection between the incoming supply and the equipment.

However, while reducing mains pollution these products can have an adverse effect on sound as a result of increasing the supply impedance or increasing capacitive or inductive loading across or in series with the electrical equipment, hereinafter referred to as the 'load'.

The present invention seeks to overcome this problem.

According to the present invention, there is provided an isolating power supply for electrical equipment, comprising a transformer having an input for a mains alternating current (AC) power supply, a rectifier by which the output of the transformer can be rectified, a primary energy storage device for electrically smoothing the output of the rectifier, a switching device which is electrically connected to the output of the primary energy storage device and which can be switched between a conducting state and a non-conducting state, and a secondary energy storage device which is electrically connected to the switching device, and means for producing a switching device control signal so that in use when the switching device is in a non-conducting state the primary energy storage device stores the output from the rectifier and the secondary energy storage device is electrically isolated from the primary energy storage device and supplies an electrical output to associated electrical equipment, and when the rectifier is no longer charging the primary energy storage device the switching device is in a conducting state so that the primary and secondary energy storage devices are electrically connected and the secondary energy storage device stores the output from the primary energy storage device.

Preferable and/or optional features of the present invention are set forth in claims 2 to 13, inclusive.

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein :

Figure 1 is a circuit diagram of a conventional prior art power supply for electrical equipment;

Figure 2 is a circuit diagram of a one embodiment of an isolating power supply, in accordance with the present invention;

Figure 3 shows graphs traced on a dual-channel oscilloscope when connected to the isolating power supply;

Figure 4 shows further graphs traced on the dual-channel oscilloscope when connected to the isolating power supply;

Figure 5 is a detailed circuit diagram of an isolating power supply developed to give a 12V DC supply.

Referring firstly to Figure 1 of the drawings, there is shown a circuit diagram of a conventional direct-current (DC) power supply, such as is used in most compact-disk (CD) players, Pre-Amplifiers, and Power Amps.

The incoming mains voltage 10 is reduced to a suitable voltage via a conventional transformer 12, and the output from this is fed to a, typically bridge, rectifier 14. The output of the bridge rectifier 14 is smoothed using large electrolytic capacitors 16 (only one shown).

In use, as the alternating-current (AC) voltage output from the transformer 12 rises sinusoidally above the output rail voltage of the supply 10, the diodes 18 in the bridge rectifier 14 conduct to charge the smoothing or reservoir capacitors 16.

The transformer output voltage then drops below the rail voltage, and the diodes 18 in the bridge rectifier 14 stop conducting.

At this point the load is fed exclusively by the smoothing capacitors 16, the voltage of which drops as power is drawn prior to the next recharging cycle. As the AC voltage output from the transformer 12 rises again above the output rail voltage of the supply, the diodes 18 in the bridge rectifier 14 conduct to recharge the smoothing capacitors 16.

This discharge/recharge cycle produces voltage variation or ripple on the supply rails.

To overcome this, an integrated circuit or monolithic-type active voltage regulator (not shown) is typically used at the output to reduce ripple and noise whilst reducing source impedance. For best results two regulators will be used to give two stage regulation, for example, from a rail voltage of 27V regulated down to 18V then to 12V. This gives up to 80db rejection of ripple and noise.



In addition to this, separate power supplies may be used to feed the individual channels of, say, a pre-amplifier to improve isolation and reduce crosstalk between left and right hand channels.

This technique is also commonly used in equipment using both digital and analogue circuits, for example, CD players, to provide isolation between digital and analogue circuits for improved performance.

Referring now to Figure 2, there is shown a circuit diagram of a first embodiment of an isolating power supply, in accordance with the present invention.

Incoming mains AC power 20 is stepped down in voltage using a transformer 22. The output of the transformer 22 is then rectified using a, typically bridge, rectifier 24 and smoothed using one or more conventional electrolytic-type primary capacitors 26 (only one shown), as per the normal type supply.

The output of the or each primary capacitor 26 is connected to a power metal oxide semiconductor field-effect transistor (MOSFET) 28, or other semiconductor, which can act as a fast switch device 30. This power MOSFET switching device 30 is controlled by a control signal 32 exhibiting a square waveform which is, in this example, 180° out of phase with the mains AC signal. The mark space ratio of the square wave control signal is set to give, in use, the required switching pattern. The

MOSFET switching device 30 may be coupled to this control signal 32 using an opto-isolator (not shown) to give total isolation from the incoming mains supply 20.

The output from the MOSFET switching device 30 is connected to one or more secondary electrolytic capacitors 34, which is/are connected across the rails feeding the load.

In use, the MOSFET switching device 30 is turned OFF while the or each primary capacitor 26 is being recharged from the incoming mains supply 20 so that no conduction occurs between the primary and secondary capacitors 26 and 34. Once recharging is complete, and the bridge rectifier 24 has stopped conducting power from the incoming supply 20, the square waveform of the control signal 32 goes HIGH, turning the MOSFET switching device 30 ON, and thus allowing the or each primary capacitor 26 to recharge the or each secondary capacitor 34.

When this is complete, the control signal 32 goes LOW and the MOSFET switching device 30 is turned OFF again prior to recharging of the or each primary capacitor 26 from the incoming mains supply 20.

Looking in more detail at the operation of the circuit, Figure 3 shows the print out from a dual channel oscilloscope.

This shows a sinusoidal trace 1 of the incoming supply 20 to the bridge rectifier 24, and trace 2 shows the square wave signal, used to control the MOSFET switching device 30 on the positive power rail, which is 180 degrees out of phase with the incoming mains AC supply 20.

When the incoming AC supply 20 is HIGH, and charging of the or each primary capacitor 26 occurs, the MOSFET switching device 30 is LOW and the secondary capacitor 34 is completely electrically isolated from the primary capacitor 26. When the AC supply 20 goes LOW and charging of the or each primary capacitor 26 no longer occurs, the control signal 32 goes HIGH causing the MOSFET switching device 30 to go HIGH, so that conduction and thus recharging of the or each secondary capacitor 34 from the or each primary capacitor 26 occurs.

Figure 4 is again a print out from a dual channel oscilloscope. Trace B shows voltage variation on the or each primary capacitor 26, whilst trace C shows the voltage variation on the or each secondary capacitor 34.

At point D, the bridge rectifier 24 starts conducting and the voltage of the or each primary capacitor 26 increases. At point E, the bridge rectifier 24 stops conducting and the voltage of the or each primary capacitor 26 falls slightly to point F. At point G the MOSFET switching device 30 starts to conduct, causing the voltage of the or each primary capacitor 26 to fall whilst the voltage of the or each secondary capacitor 34 rises to point H. The primary and secondary capacitors 26 and 34 then

work in parallel to feed the load with a slow fall in voltage until point I just before the or each primary capacitor 26 starts to recharge. At this point, the MOSFET switching device 30 turns OFF prior to the cycle repeating.

Note, in Figure 4, low value capacitors have been used to magnify and show clearly the switching sequence.

The same principles can be used to make a dual rail supply. In this case, a MOSFET switching device is used on both supply rails and controlled by square wave switching  $180^\circ$  out of phase with the relevant positive or negative part of the AC supply. Figure 5 shows a detailed circuit diagram of an isolating power supply developed to give a 12V DC supply.

It should be understood that, although the semiconductor switching device has been described as only operating between an ON and an OFF state, its conduction could vary sinusoidally, or in any other suitable manner, over a range between a conducting state and a non-conducting state, as long as the variation is out of phase with the incoming AC mains supply, so that conduction between the primary capacitor and the secondary capacitor does not occur while the primary capacitor is being recharged.

As well as providing isolation from the mains power supply, the circuit design can also be used to provide total isolation between circuits. This can be achieved using two supplies fed from a single transformer.

It is possible to use other energy storage devices to store the energy in place of electrolytic capacitors. For example, inductors could be utilised.

In addition to a power MOSFET switching device, or other semiconductor switching device, any other suitable switching device which can provide total isolation of the secondary energy storage device from the incoming mains power supply could be used.

It is thus possible to provide total isolation from a contaminated incoming mains supply, and to provide isolation between circuits, by the inclusion of a switching system and one or more additional energy storage devices. Sound quality and reproduction can thus be maintained without the necessary requirement of costly mains conditioning units, filters and specialist noise cancelling cables and the disadvantages associated therewith.

The above isolating power supply can also be incorporated within the output section of switched mode type power supplies where it operates in the same way but serves to provide isolation from the high frequency interference generally produced on the output of this type of supply.

The embodiments described above are given by way of examples only, and various modifications will be apparent to persons skilled in the art without departing from the scope of the invention as defined by the appended claims.

CLAIMS

1. An isolating power supply for electrical equipment, comprising a transformer having an input for a mains alternating current (AC) power supply, a rectifier by which the output of the transformer can be rectified, a primary energy storage device for electrically smoothing the output of the rectifier, a switching device which is electrically connected to the output of the primary energy storage device and which can be switched between a conducting state and a non-conducting state, and a secondary energy storage device which is electrically connected to the switching device, and means for producing a switching device control signal so that in use when the switching device is in a non-conducting state the primary energy storage device stores the output from the rectifier and the secondary energy storage device is electrically isolated from the primary energy storage device and supplies an electrical output to associated electrical equipment, and when the rectifier is no longer charging the primary energy storage device the switching device is in a conducting state so that the primary and secondary energy storage devices are electrically connected and the secondary energy storage device stores the output from the primary energy storage device.

2. An isolating power supply as claimed in claim 1, wherein the switching device is a semiconductor switching device.

3. An isolating power supply as claimed in claim 2, wherein the semiconductor switching device is electrically connected to a control signal via an opto-isolator.
4. An isolating power supply as claimed in claim 4, wherein the control signal is  $180^{\circ}$  out of phase with the mains AC power supply.
5. An isolating power supply as claimed in claim 3 or claim 4, wherein the control signal has a square waveform.
6. An isolating power supply as claimed in any one of claims 2 to 5, wherein the switching device is a metal oxide semiconductor field-effect transistor (MOSFET).
7. An isolating power supply as claimed in any one of the preceding claims, wherein the primary energy storage device is a capacitor.
8. An isolating power supply as claimed in any one of claims 1 to 6, wherein the primary energy storage device is an inductor.
9. An isolating power supply as claimed in any one of the preceding claims, wherein the secondary energy storage device is a capacitor.
10. An isolating power supply as claimed in any one of claims 1 to 8, wherein the secondary energy storage device is an inductor.



11. An isolating power supply as claimed in any one of the preceding claims, wherein a plurality of primary energy storage devices are provided.
12. An isolating power supply as claimed in any one of the preceding claims, wherein a plurality of secondary energy storage devices are provided.
13. An isolating power supply as claimed in any one of the preceding claims, wherein the rectifier is a bridge rectifier.
14. An isolating power supply substantially as hereinbefore described with reference to Figures 1 to 4, or Figure 5 of the accompanying drawings.

ABSTRACTISOLATING POWER SUPPLY

An isolating power supply for electrical equipment comprises a transformer 22 having an input for a mains alternating current (AC) power supply 20, a rectifier 24 by which the output of the transformer 20 can be rectified, and a primary energy storage device 26 for electrically smoothing the output of the rectifier 24. A switching device 30 is provided which is electrically connected to the output of the primary energy storage device 26 and which can be switched between a conducting state and a non-conducting state, and a secondary energy storage device 34 is also provided which is electrically connected to the switching device 30. In use, when the switching device 30 is in a non-conducting state, the primary energy storage device 26 stores the output from the rectifier 24 and the secondary energy storage device 34 is electrically isolated from the primary energy storage device 26 and supplies an electrical output to associated electrical equipment. When the switching device 30 is a conducting state, the primary and secondary energy storage devices 26,34 are electrically connected and the secondary energy storage device 34 stores the output from the primary energy storage device 26. Preferably, the switching device 30 is a power MOSFET switching device.

(Refer to Figure 2)

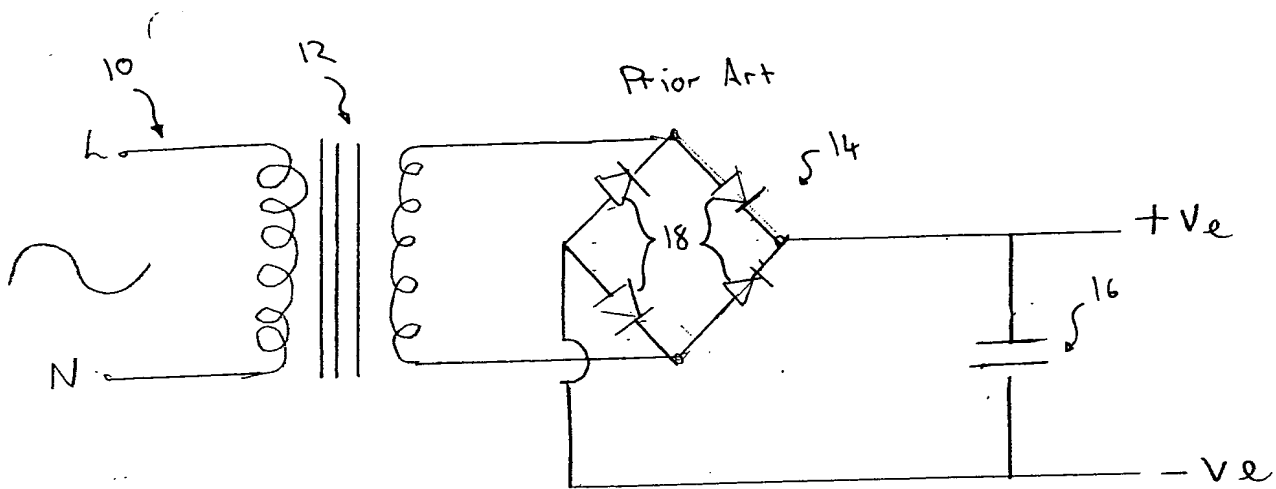


FIGURE 1

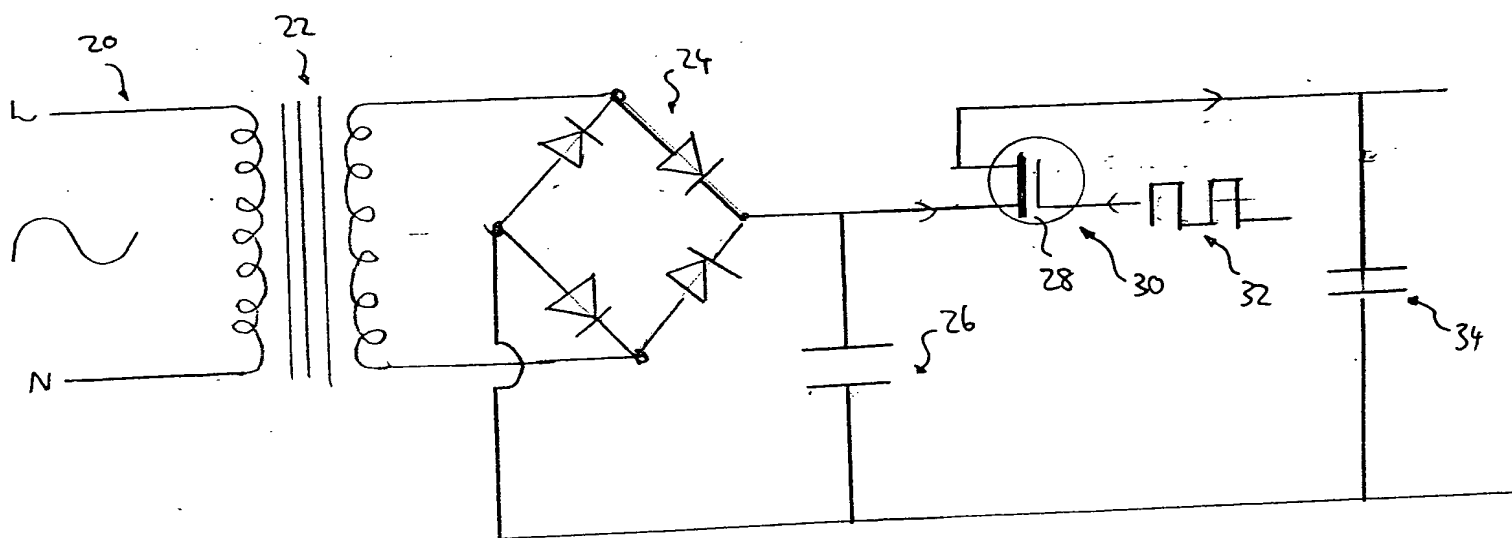


FIGURE 2



Figure 3

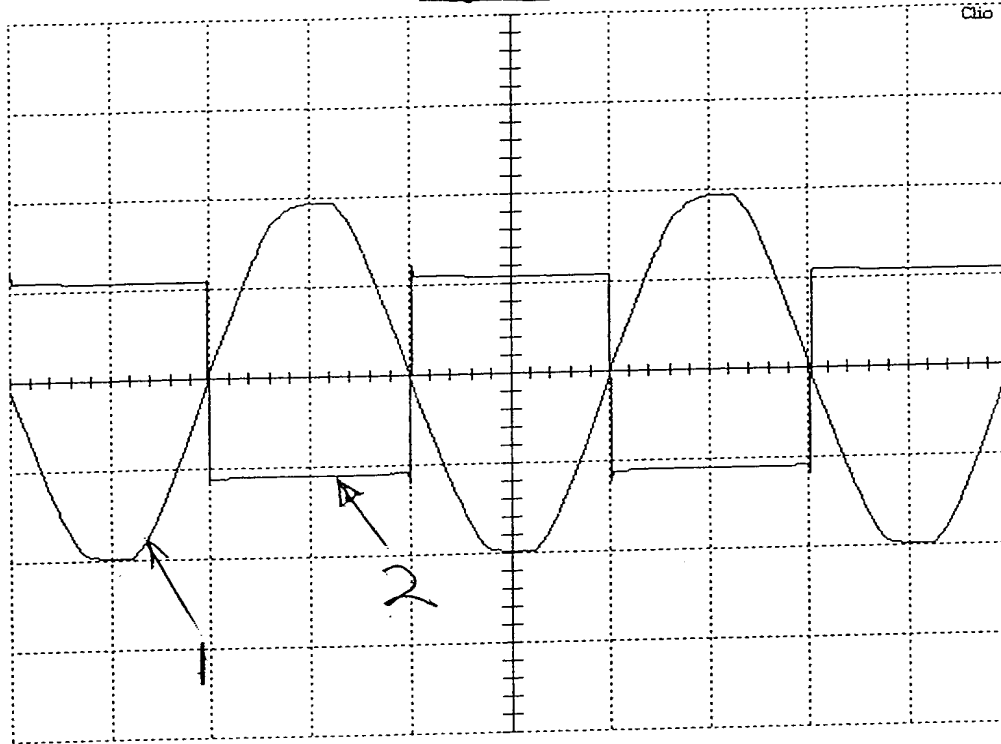
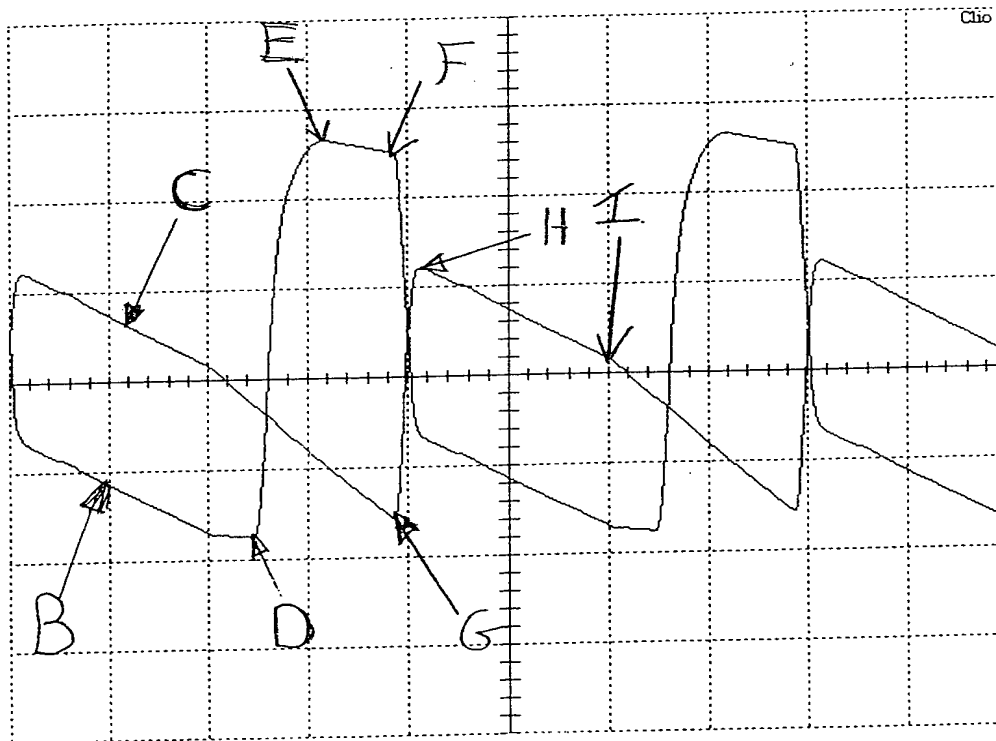


Figure 4





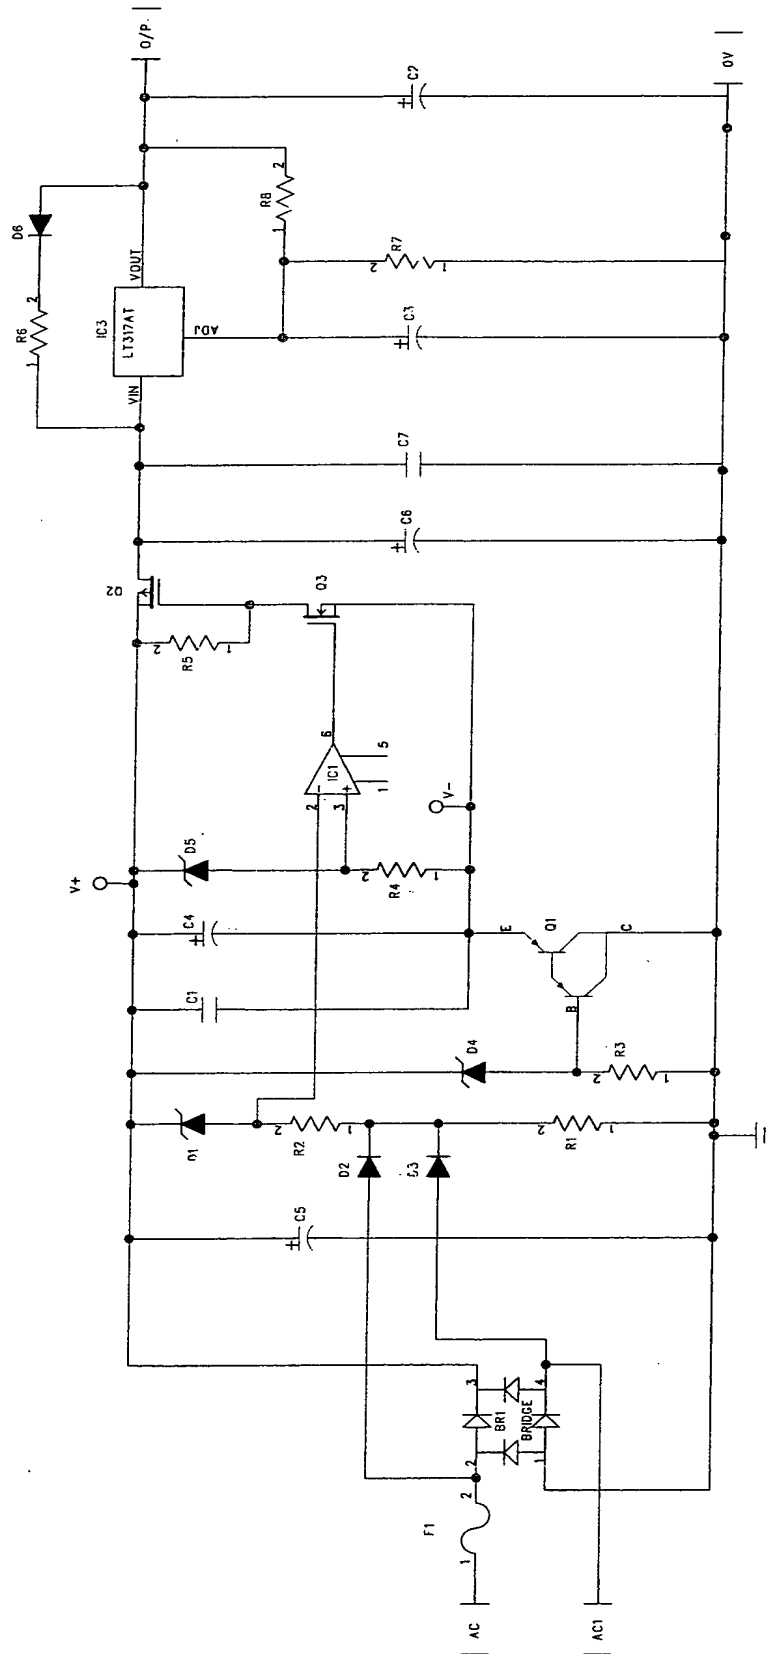


FIGURE 5

Document Filed By:

Young & Thompson

745 South 23rd Street

Arlington, Virginia 22202

Telephone 703/521-2297

SN 10 / 615,235 Filed July 9, 2008